
## NOTES:

- THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHIHA PRODUCTS.
  ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS
   UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL
   BUILDING CODES.
- METAL FURRING CHANNEL CAN BE "Z" OR 7/8" HAT CHANNEL AND MUST BE A MINIMUM OF 18 GA.
- 3. COMPLY WITH LOCAL BUILDING CODE FOR REQUIREMENT OF WRB.
- 4. NICHIHA PANEL REPRESENTED HERE IS 5/8" NICHIHA PRODUCT, ADJUST ACCORDINGLY FOR OTHER NICHIHA PRODUCT THICKNESSES.

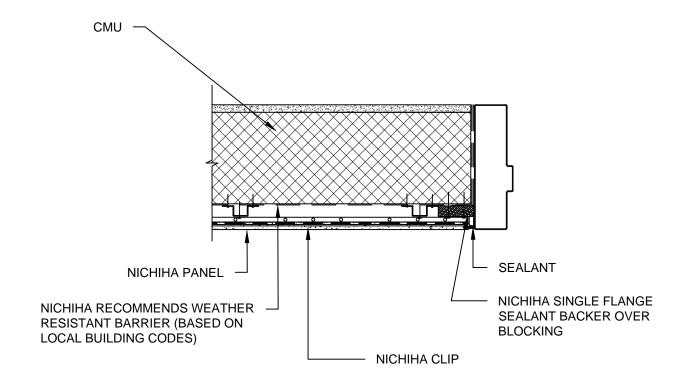

10 mm CMU WITH FURRING 6-10' HORIZONTAL PANEL DOOR JAMB DETAIL